



# D-Series Size 0 LED Area Luminaire



Catalog  
Number

Notes



Type

Hit the Tab key or mouse over the page to see all interactive elements.

d<sup>#</sup>series

## Specifications

EPA:	0.44 ft <sup>2</sup> (0.04 m <sup>2</sup> )
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

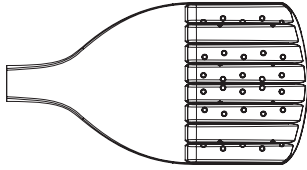

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

## Ordering Information

**EXAMPLE:** DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED	Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting		
DSX0 LED	<b>Forward optics</b>	P1 P5	30K 3000K	70CRI	AFR Automotive front row	T5M Type V medium	MVOLT (120V-277V) <sup>4</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole) RPA Round pole mounting (#8 drilling, 3" min. RND pole) SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole) WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)	
		P2 P6	40K 4000K	70CRI	T1S Type I short	T5LG Type V low glare	HVOLT (347V-480V) <sup>5,6</sup>		
		P3 P7	50K 5000K	70CRI	T2M Type II medium	T5W Type V wide	XVOLT (277V-480V) <sup>7,8</sup>		
		P4	(this section 80CRI only, extended lead times apply)		80CRI	T3M Type III medium	BLC3 Type III backlight control <sup>3</sup>		120 <sup>16,24</sup>
		P10 <sup>1</sup> P12 <sup>1</sup>	27K 2700K	T3LG Type III low glare <sup>3</sup>		BLC4 Type IV backlight control <sup>3</sup>	208 <sup>16,24</sup>		
		P11 <sup>1</sup> P13 <sup>1</sup>	30K 3000K	T4M Type IV medium		LCCO Left corner cutoff <sup>3</sup>	240 <sup>16,24</sup>		
		35K 3500K	T4LG Type IV low glare <sup>3</sup>	RCCO Right corner cutoff <sup>3</sup>		277 <sup>16,24</sup>			
		40K 4000K	TFTM Forward throw medium			347 <sup>16,24</sup>			
		50K 5000K				480 <sup>16,24</sup>			

Control options	Other options	Finish (required)
<b>Shipped installed</b> NLTAIR2 PIRHN nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11,12,18,19</sup> PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13,18,19</sup> PER NEMA twist-lock receptacle only (controls ordered separately) <sup>14</sup> PER5 Five-pin receptacle only (controls ordered separate) <sup>14,19</sup>	<b>Shipped installed</b> HS Houseside shield (black finish standard) <sup>20</sup> L90 Left rotated optics <sup>1</sup> R90 Right rotated optics <sup>1</sup> CCE Coastal Construction <sup>21</sup> HA 50°C ambient operation <sup>22</sup> BAA Buy America(n) Act Compliant SF Single fuse (120, 277, 347V) <sup>24</sup> DF Double fuse (208, 240, 480V) <sup>24</sup> <b>Shipped separately</b> EGSR External Glare Shield (reversible, field install required, matches housing finish) BSDB Bird Spikes (field install required)	DDBXD Dark Bronze DBLXD Black DNAXD Natural Aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



## Ordering Information

### Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSXOHS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSXOEGSR (FINISH)	External glare shield (specify finish)
DSXOBSDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOLT not available in packages P1, P2 or P10. XVOLT not available with fusing (SF or DF).
- 9 SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using XVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- 13 PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1, P2 and P10 using XVOLT. PIR not available with P1 using MVOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120, 277 or 347V. Consult tech support for 208, 240 or 480V.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- 18 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 19 Reference Controls Options table on page 4.
- 20 Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 21 CCE option not available with option B5 and EGSR. Contact Technical Support for availability.
- 22 Option HA not available with performance packages P6, P7, P12 and P13.
- 23 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 24 Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories





External Glare Shield (EGSR)

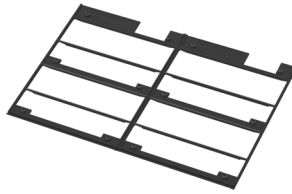

House Side Shield (HS)

## Drilling

### HANDHOLE ORIENTATION (from top of pole)

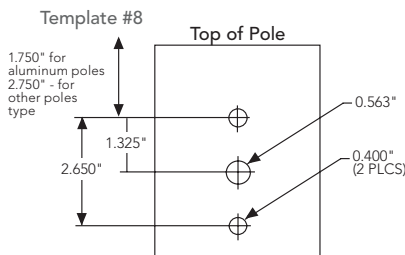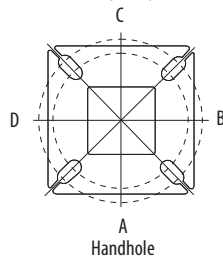

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"	3.5"	3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"	3"	3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"	3"	3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145				
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147				
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131				
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149				
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136				
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150				
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154				
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156				
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154				
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107				
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111				
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108				
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157				
				P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
								T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
T3M	5,930	1	0					3	131	6,180	1	0	3	137	6,301	1	0	3	140				
T3LG	5,297	1	0					1	117	5,521	1	0	1	122	5,628	1	0	1	125				
T4M	6,018	1	0					3	133	6,272	1	0	3	139	6,395	1	0	3	142				
T4LG	5,474	1	0					1	121	5,705	1	0	1	126	5,816	1	0	1	129				
TFTM	6,060	1	0					3	134	6,316	1	0	3	140	6,439	1	0	3	143				
T5M	6,192	3	0					1	137	6,453	3	0	2	143	6,579	3	0	2	146				
T5W	6,293	3	0					2	139	6,558	3	0	2	145	6,686	3	0	2	148				
T5LG	6,210	2	0					1	138	6,472	3	0	1	143	6,598	3	0	1	146				
BLC3	4,313	0	0					2	96	4,495	0	0	2	100	4,583	0	0	2	102				
BLC4	4,455	0	0					2	99	4,643	0	0	2	103	4,733	0	0	2	105				
RCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
LCCO	4,352	0	0					2	96	4,536	0	0	2	100	4,624	0	0	2	102				
AFR	6,328	1	0					1	140	6,595	1	0	1	146	6,724	1	0	1	149				
P3	69W	20	1050					T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
								T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130				
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116				
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132				
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120				
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133				
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136				
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138				
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136				
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95				
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98				
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95				
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139				
				P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
								T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
T3M	10,680	2	0					3	115	11,130	2	0	3	120	11,347	2	0	3	122				
T3LG	9,540	1	0					2	103	9,942	1	0	2	107	10,136	1	0	2	109				
T4M	10,839	2	0					3	117	11,296	2	0	3	121	11,516	2	0	4	124				
T4LG	9,858	1	0					2	106	10,274	1	0	2	110	10,474	1	0	2	113				
TFTM	10,914	2	0					3	117	11,374	2	0	3	122	11,596	2	0	3	125				
T5M	11,152	4	0					2	120	11,622	4	0	2	125	11,849	4	0	2	127				
T5W	11,332	4	0					3	122	11,811	4	0	3	127	12,041	4	0	3	129				
T5LG	11,184	3	0					1	120	11,656	3	0	2	125	11,883	3	0	2	128				
BLC3	7,768	0	0					2	83	8,096	0	0	2	87	8,254	0	0	2	89				
BLC4	8,023	0	0					3	86	8,362	0	0	3	90	8,524	0	0	3	92				
RCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
LCCO	7,838	1	0					2	84	8,169	1	0	2	88	8,328	1	0	2	90				
AFR	11,396	1	0					2	122	11,877	1	0	2	128	12,109	2	0	2	130				



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642
T2M	16,253	3	0					4	119	16,939	3	0	4	124	17,269	3	0	4	126
T3M	16,442	2	0					4	120	17,135	3	0	4	125	17,469	3	0	4	128
T3LG	14,687	2	0					2	107	15,306	2	0	2	112	15,605	2	0	2	114
T4M	16,687	2	0					4	122	17,391	3	0	5	127	17,730	3	0	5	129
T4LG	15,177	2	0					2	111	15,817	2	0	2	115	16,125	2	0	2	118
TFTM	16,802	2	0					4	123	17,511	2	0	4	128	17,852	2	0	5	130
T5M	17,168	4	0					2	125	17,893	5	0	3	131	18,241	5	0	3	133
T5W	17,447	5	0					3	127	18,183	5	0	3	133	18,537	5	0	3	135
T5LG	17,218	4	0					2	126	17,944	4	0	2	131	18,294	4	0	2	134
BLC3	11,959	0	0					3	87	12,464	0	0	3	91	12,707	0	0	3	93
BLC4	12,352	0	0					4	90	12,873	0	0	4	94	13,124	0	0	4	96
RCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94
LCCO	12,067	1	0					3	88	12,576	1	0	3	92	12,821	1	0	3	94
AFR	17,545	2	0					3	128	18,285	2	0	3	133	18,642	2	0	3	136
P7	171W	40	1300					T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106
				T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129


# Performance Data

## Lumen Output



Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943
T2M	8,669	3	0					3	127	9,034	3	0	3	133	9,211	3	0	3	135
T3M	8,768	3	0					3	129	9,138	3	0	3	134	9,316	3	0	3	137
T3LG	7,833	3	0					3	115	8,164	3	0	3	120	8,323	3	0	3	122
T4M	8,899	3	0					3	131	9,274	3	0	3	136	9,455	3	0	3	139
T4LG	8,093	3	0					3	119	8,435	3	0	3	124	8,599	3	0	3	126
TFTM	8,962	3	0					3	132	9,340	3	0	3	137	9,522	3	0	3	140
T5M	9,156	4	0					2	135	9,542	4	0	2	140	9,728	4	0	2	143
T5W	9,304	4	0					2	137	9,696	4	0	2	143	9,885	4	0	2	145
T5LG	9,182	3	0					1	135	9,569	3	0	1	141	9,756	3	0	1	143
BLC3	6,378	3	0					3	94	6,647	3	0	3	98	6,777	3	0	3	100
BLC4	6,587	3	0					3	97	6,865	3	0	3	101	6,999	3	0	3	103
RCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101
LCCO	6,436	0	0					2	95	6,707	0	0	2	99	6,838	0	0	2	101
AFR	9,358	3	0					3	138	9,753	3	0	3	143	9,943	3	0	3	146
P12	103W	30	1050					T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685
T2M	14,547	4	0					4	113	15,161	4	0	4	118	15,457	4	0	4	120
T3M	14,714	4	0					4	114	15,335	4	0	4	119	15,634	4	0	4	121
T3LG	13,145	3	0					3	102	13,700	3	0	3	106	13,967	3	0	3	108
T4M	14,933	4	0					4	116	15,563	4	0	4	121	15,867	4	0	4	123
T4LG	13,582	3	0					3	105	14,155	3	0	3	110	14,431	3	0	3	112
TFTM	15,039	4	0					4	117	15,673	4	0	4	122	15,979	4	0	4	124
T5M	15,364	4	0					2	119	16,013	4	0	2	124	16,325	4	0	2	127
T5W	15,613	5	0					3	121	16,272	5	0	3	126	16,589	5	0	3	129
T5LG	15,409	3	0					2	120	16,059	3	0	2	125	16,372	4	0	2	127
BLC3	10,703	4	0					4	83	11,155	4	0	4	87	11,372	4	0	4	88
BLC4	11,054	4	0					4	86	11,520	4	0	4	89	11,745	4	0	4	91
RCCO	10,800	1	0					2	84	11,256	1	0	2	87	11,475	1	0	3	89
LCCO	10,800	1	0					2	84	11,255	1	0	2	87	11,475	1	0	3	89
AFR	15,704	3	0					3	122	16,366	3	0	3	127	16,685	4	0	4	130



# Dimensions

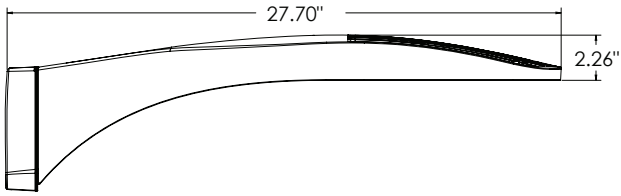


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 25 lbs**

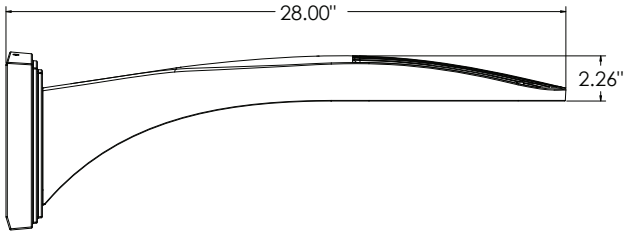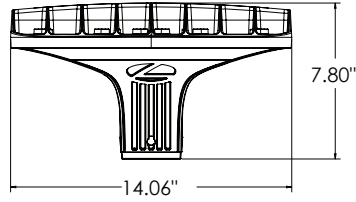


**DSX0 with WBA mount**  
**Weight: 27 lb**

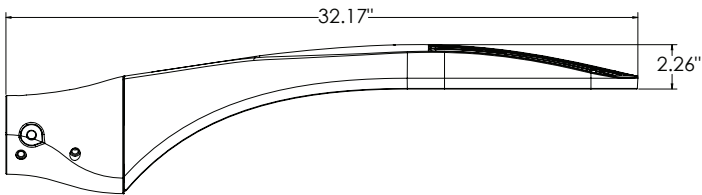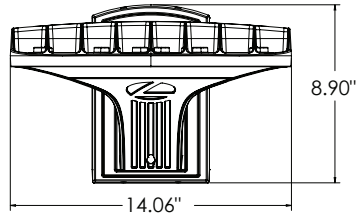


**DSX0 with MA mount**  
**Weight: 28 lbs**

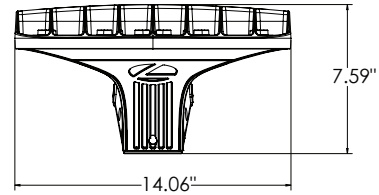


**SPA (STANDARD ARM)**

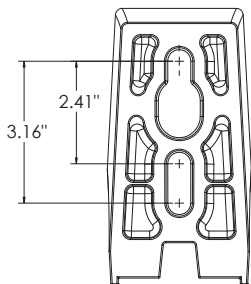


**RPA**

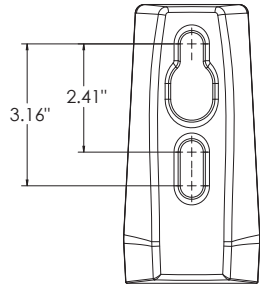


**SPA5**

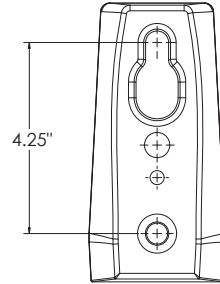

**RPA5**

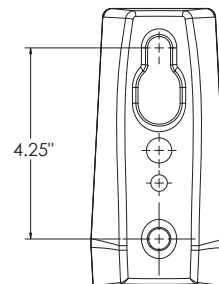




**SPA8N**

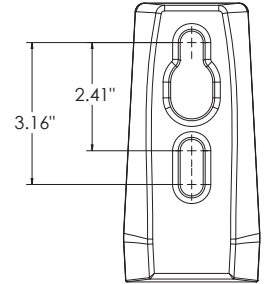



## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

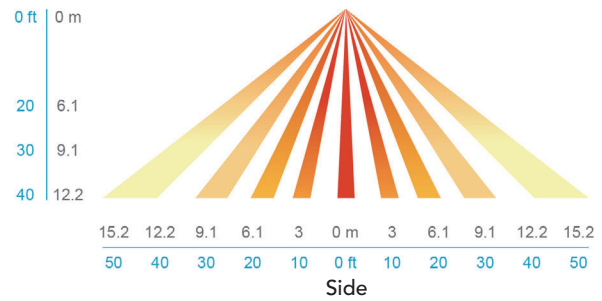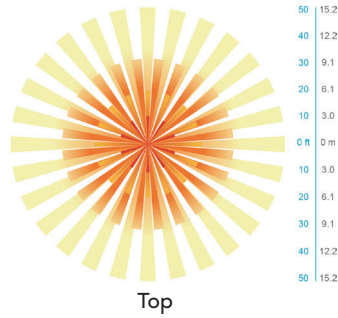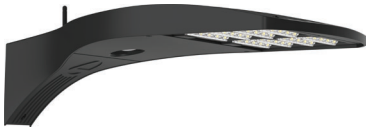

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### BUY AMERICAN ACT

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# WEDGE1 LED

## Architectural Wall Sconce



Catalog Number


Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Specifications

- Depth (D1):** 5.5"
- Depth (D2):** 1.5"
- Height:** 8"
- Width:** 9"
- Weight:** 9 lbs  
(without options)

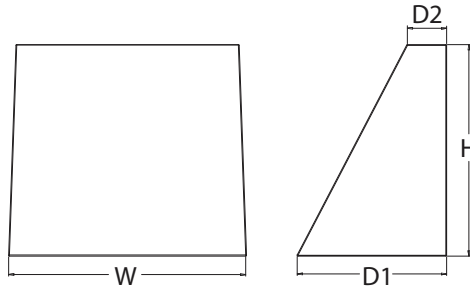

### Introduction

The WEDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing true site-wide solution.

WEDGE1 delivers up to 2,000 lumens with a soft, non-pixelated light source, creating a visually comfortable environment. The compact size of WEDGE1, with its integrated emergency battery backup option, makes it an ideal over-the-door wall-mounted lighting solution.

### WEDGE LED Family Overview

Luminaire	Standard EM, 0°C	Cold EM, -20°C	Sensor	Lumens (4000K)					
				P1	P2	P3	P4	P5	P6
WEDGE1 LED	4W	--	--	1,200	2,000	--	--	--	--
WEDGE2 LED	10W	18W	Standalone / nLight	1,200	2,000	3,000	4,500	6,000	--
WEDGE3 LED	15W	18W	Standalone / nLight	7,500	8,500	10,000	12,000	--	--
WEDGE4 LED	--	--	Standalone / nLight	12,000	16,000	18,000	20,000	22,000	25,000

### Ordering Information

**EXAMPLE:** WEDGE1 LED P2 40K 80CRI VF MVOLT SRM PE DDBXD

Series	Package	Color Temperature	CRI	Distribution	Voltage	Mounting
WEDGE1 LED	P1 P2	27K 2700K	80CRI	VF Visual comfort forward throw	MVOLT 347 <sup>2</sup>	<b>Shipped included</b> SRM Surface mounting bracket ICW Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) <sup>5</sup>  <b>Shipped separately</b> AWS 3/8inch Architectural wall spacer PBBW Surface-mounted back box (top, left, right conduit entry) Use when there is no junction box available.
		30K 3000K	90CRI	VW Visual comfort wide		
		35K 3500K				
		40K 4000K				
		50K <sup>1</sup> 5000K				

Options	Finish
E4WH <sup>3</sup> Emergency battery backup, Certified in CA Title 20 MAEDBS (4W, 0°C min)	DDBXD Dark bronze
PE <sup>4</sup> Photocell, Button Type	DBLXD Black
DS Dual switching (comes with 2 drivers and 2 light engines; see page 3 for details)	DNAXD Natural aluminum
DMG 0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately)	DWHXD White
BCE Bottom conduit entry for back box (PBBW). Total of 4 entry points.	DSSXD Sandstone
BAA Buy America(n) Act Compliant	DDBTXD Textured dark bronze
	DBLTXD Textured black
	DNATXD Textured natural aluminum
	DWHGXD Textured white
	DSSTXD Textured sandstone

### Accessories

Ordered and shipped separately.

- WDGEAWS DDBXD WEDGE 3/8inch Architectural Wall Spacer (specify finish)
- WDGE1PBBW DDBXD U WEDGE1 surface-mounted back box (specify finish)

### NOTES

- 1 50K not available in 90CRI.
- 2 347V not available with E4WH, DS or PE.
- 3 E4WH not available with PE or DS.
- 4 PE not available with DS.
- 5 Not qualified for DLC. Not available with E4WH.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

WEDGE1 LED  
Rev. 01/18/22

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	27K (2700K, 80 CRI)					30K (3000K, 80 CRI)					35K (3500K, 80 CRI)					40K (4000K, 80 CRI)					50K (5000K, 80 CRI)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P1	10W	VF	1,120	112	0	0	0	1,161	116	0	0	0	1,194	119	0	0	0	1,227	123	0	0	0	1,235	123	0	0	0
		VW	1,122	112	0	0	0	1,163	116	0	0	0	1,196	120	0	0	0	1,229	123	0	0	0	1,237	124	0	0	0
P2	15W	VF	1,806	120	1	0	0	1,872	125	1	0	0	1,925	128	1	0	0	1,978	132	1	0	0	1,992	133	1	0	0
		VW	1,809	120	1	0	0	1,876	125	1	0	0	1,929	128	1	0	0	1,982	132	1	0	0	1,996	133	1	0	0

### Electrical Load

Performance Package	System Watts	Current (A)				
		120V	208V	240V	277V	347V
P1	10W	0.082	0.049	0.043	0.038	--
	13W	--	--	--	--	0.046
P2	15W	0.132	0.081	0.072	0.064	--
	18W	--	--	--	--	0.056

### Lumen Multiplier for 90CRI

CCT	Multiplier
27K	0.845
30K	0.867
35K	0.845
40K	0.885
50K	0.898

### Lumen Output in Emergency Mode (4000K, 80 CRI)

Option	Dist. Type	Lumens
E4WH	VF	646
	VW	647

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier
0°C / 32°F	1.03
10°C / 50°F	1.02
20°C / 68°F	1.01
25°C / 77°F	1.00
30°C / 86°F	0.99
40°C / 104°F	0.98

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).


To calculate LMF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.96	>0.95	>0.91


## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

### LEGEND



MH = 8ft  
Grid = 8ft x 8ft

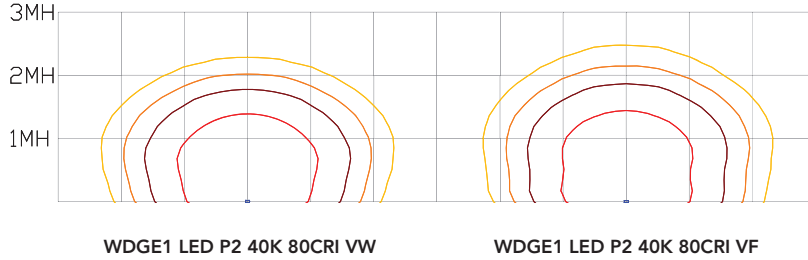


## Emergency Egress Options

### Emergency Battery Backup

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90 minutes.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9

The example below shows illuminance of 1 fc average and 0.1 fc minimum in emergency mode with E4WH and VF distribution.

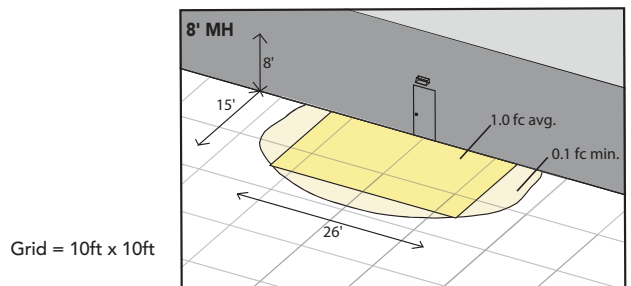


WDGE1 LED xx 40K 80CRI VF MVOLT E4WH

### Dual Switching (DS) Option

The dual switching option offers operational redundancy that certain codes require. With this option the luminaire comes integrated with two drivers and two light engines. These work completely independent to each other so that a failure of any individual component does not cause the whole luminaire to go dark. This option is typically used with a back generator or inverter providing emergency power.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9

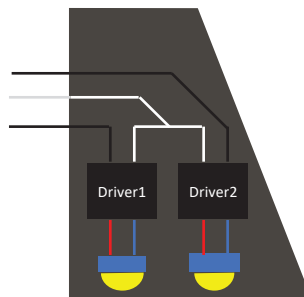



### E4WH – 4W Emergency Battery Backup

D = 5.5"

H = 8"

W = 9"



### PBBW – Surface-Mounted Back Box

Use when there is no junction box available.

D = 1.75"

H = 8"

W = 9"



### AWS – 3/8inch Architectural Wall Spacer

D = 0.38"

H = 4.4"

W = 7.5"

## FEATURES & SPECIFICATIONS

### INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

### CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP66 rating for the luminaire.

### FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

### OPTICS

Well crafted reflector optics allow the light engine to be recessed within the luminaire, providing visual comfort, superior distribution, uniformity, and spacing in wall-mount applications. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2). Fixture ships standard with 0-10v dimmable driver.

### INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 2700K and 3000K color temperature only and SRM mounting only.

### BUY AMERICAN

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# Podz™ LED Downlight Series

4" Canless Round and Square LED Downlight  
New Construction or Remodel

## JPDZ4 Series



Complete remodel fixture shown




Complete new construction fixture shown




### Dimensions

#### 4" Round

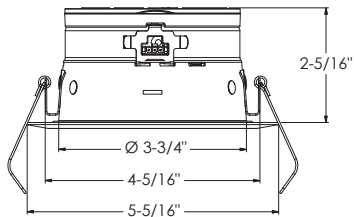


#### 4" Square

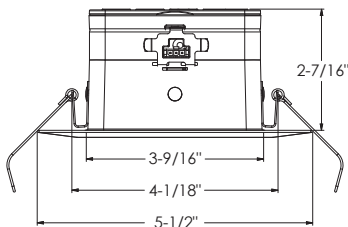

### Application Flexibility - Remodel



### Application Flexibility - New Construction

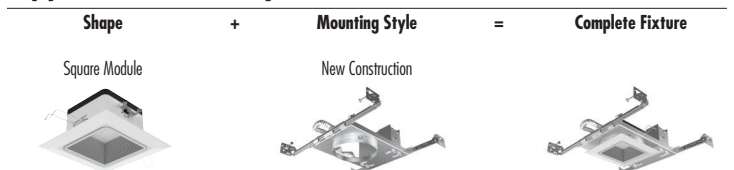

Project:
Fixture Type:
Location:
Contact/Phone:

### Product Features

Canless low profile 4" LED recessed downlight with deeply regressed light source and technology rich features offers performance up to 1200L and installation solutions for both new construction and remodel applications.

Patented color temperature and intensity configurable lighting fixture (US Patent No. 11,259,377 B2)

- Integrated light engine offers switchable LED color temperature and adjustable lumen output directly on module for easy switching
- Advanced color mixing technology provides consistent color rendering on the black body curve at all LED color temperatures while maintaining a high 90+ CRI
- Warmdim™ setting provides performance similar to incandescent light sources and warms the LED color temperature over the dimming range from 2850K to 1900K

#### Installation flexibility and ease

- Low profile integrated LED downlight less than 3" in height fits virtually anywhere
- Installs directly into the plenum - eliminates need for typical recessed housing
- Installs into new construction or remodel applications

### Applications

- Ideal for a breadth of residential and commercial applications
- Shallow plenum installations
- IC rated - for direct contact with insulation
- Wet location listed - for use in shower and outdoor covered ceiling applications

### Performance

Switchable Delivered Lumens	700L, 1000L, 1200L
Switchable LED Color Temperature	27K, 30K, 35K, 40K, 50K
WarmDim Included as standard	2850K - 1900K over dimming range
CRI	90+
Voltage	Dedicated 120V or MVOLT (120-277V)
Dimming	Forward/Reverse Phase or 0-10V Dimming range from 100% to 5%



# Podz™ LED Downlight Series

4" Canless Round and Square LED Downlight  
New Construction or Remodel

## ORDERING INFORMATION


Two ways to order Podz:

### 1. Ship separate trim module and mounting

Trim Module



Mounting Option

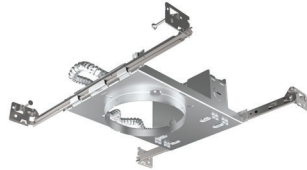

or



Example: JPDZ4 DC ALO10 SWW5WD 90CRI JPDZRMJBX 120 FRPC WWH, Ships as example: Trim module: JPDZ4 DC ALO10 SWW5WD 90CRI 120 FRPC WWH M6, Mounting: JPDZRMJBX 120 FRPC M6



Series	Trim Type	Lumens	Color Temperature	CRI
JPDZ4 Juno Podz 4" LED Downlights	<b>DB</b> Round Downlight Baffle <b>DC</b> Round Downlight Cone <b>SQDB</b> Square Downlight Baffle <b>SQDC</b> Square Downlight Reflector	<b>ALO10</b> Adjustable Lumen Output 700L, 1000L, and 1200L	<b>SWW5WD</b> Switchable White 2700K, 3000K, 3500K, 4000K, 5000K, + WarmDim (2850K-1900K)	<b>90CRI</b> 90+CRI

Mounting (Required for complete fixture)	Voltage/Driver	Finish
<b>REMODEL:</b> <b>JPDZRMJBX<sup>4</sup></b> Juno Podz universal remodel junction box (for 4", 5", 6")	<b>120 FRPC</b> 120V Forward/Reverse Phase Cut, 5% dim <b>MVOLT ZT10</b> Multi-Volt (120-277), 0-10V, 10% dim	<b>WWH<sup>1</sup></b> White, White Trim Ring <b>BWH<sup>2</sup></b> Black, White Trim Ring <b>CWH<sup>3</sup></b> Clear, White Trim Ring <b>HZWH<sup>3</sup></b> Haze, White Trim Ring <b>WHZWH<sup>3</sup></b> Wheat Haze, White Trim Ring
<b>NEW CONSTRUCTION:</b> <b>JPDZ4RDNCMF</b> Juno Podz 4IN Round New Construction Mounting Frame <b>JPDZ4SQNCMF</b> Juno Podz 4IN Square New Construction Mounting Frame		

### NOTES

- 1 WWH is available with DB, SQDB, DC and SQDC.
- 2 BWH only available with DB and SQDB.
- 3 CWH, HZWH and WHZWH only available with DC and SQDC.
- 4 Not for use in an existing housing.



### 2. All-in-one box remodel downlight

Series	Trim Type/Voltage	Finish
JPDZ4JB Juno Podz 4" Trim and Remodel Junction Box	<b>RDB1</b> Round Downlight Baffle 120V <b>RDC1</b> Round Downlight Cone 120V	<b>WWH</b> White, White Trim Ring

### EMERGENCY OPERATION OPTION

For use in Non-IC applications where insulation is spaced at least 3" away. If installing from below the ceiling, minimum plenum depths required: IIS 25 = 15 7/8" for JPDZ4 RD and 14 3/4" for JPDZ4 SQ. IIS 50 = 20 1/8" for JPDZ4 RD and 18 5/8" for JPDZ4 SQ.

Iota IIS 25 I	25W Emergency Micro-Inverter
Iota IIS 50 I	50W Emergency Micro-Inverter

### ACCESSORIES

Trim inserts are interchangeable and field installable to easily change the aesthetic of the Podz luminaire

RK3JPDZ4 DB BWH BFL	4" Round Baffle Black Trim Insert
RK3JPDZ4 DB WWH BFL	4" Round Baffle White Trim Insert
RK3JPDZ4 DC CWH RFL	4" Round Cone Clear Trim Insert
RK3JPDZ4 DC HZWH RFL	4" Round Cone Haze Trim Insert
RK3JPDZ4 DC WHZWH RFL	4" Round Cone Wheat Haze Trim Insert
RK3JPDZ4 DC WWH RFL	4" Round Cone White Trim Insert
RK3JPDZ4 SQDB BWH BFL	4" Square Baffle Black Trim Insert
RK3JPDZ4 SQDB WWH BFL	4" Square Baffle White Trim Insert
RK3JPDZ4 SQDC CWH RFL	4" Square Cone Clear Trim Insert
RK3JPDZ4 SQDC HZWH RFL	4" Square Cone Haze Trim Insert
RK3JPDZ4 SQDC WHZWH RFL	4" Square Cone Wheat Haze Trim Insert
RK3JPDZ4 SQDC WWH RFL	4" Square Cone White Trim Insert





## Podz™ LED Downlight Series

4" Canless Round and Square LED Downlight  
New Construction or Remodel

### Specifications

#### LED Light Engine

Patented color temperature and intensity configurable lighting fixture (US Patent No. 11,259,377 B2) with integrated light engine that mounts directly to aluminum housing providing superior heat transfer to ensure long life of the electronics • Switchable LED color temperature and adjustable lumen output directly on module for easy switching • Advanced color mixing technology provides consistent color rendering on the black body curve at all LED color temperatures • LED color temperature settings include 2700K, 3000K, 3500K, 4000K and 5000K; factory set at 3000K • Three lumen switching options include 700L, 1000L and 1200L; factory set at 1000L • Dedicated WarmDim setting provides performance similar to incandescent light sources and warms the LED color temperature over the dimming range from 2850K to 1900K • 90CRI minimum

#### LED Driver

Choice of dedicated 120 volt (120) driver or universal voltage (MVOLT) drivers that accommodate input voltages from 120-277 volts AC at 50/60Hz • Power factor > 0.9 at 120V input • 120 volt only driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • Universal voltage drivers are dimmable with the use of most 0-10V wall box dimmers • For a list of compatible dimmers, see [JUNOICLED-DIM](#)

#### Optical System

Computer-optimized reflector design with high reflectance white finish coupled with a high transmission diffusing lens conceals the LEDs and produces uniform aperture luminance • Deep regression of lens produces a low glare, efficient system typical of a standard 4" downlight medium flood distribution providing even illumination for general downlighting applications.

#### Certifications

ENERGY STAR® Certified • Can be used to comply with 2019 Title 24, Part 6, JA8 high efficacy LED light source requirements • UL listed for U.S. and Canada through-branch wiring, damp locations and for wet location (indoor and outdoor covered ceiling) • UL and cUL • NOM certified.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

#### Trim Module Construction

Low profile, < 3" aluminum housing with integral white flange • Designed for installation directly into the plenum in IC (insulated ceiling) or non-IC construction • Provided with spring clips for ease of installation • Accommodates up to a 1 1/2" ceiling thickness

#### Trim Finishes

Choice of baffle or cone trims in a selection of finishes ship installed in trim • Optional field installable trim inserts available.

#### Remodel Junction Box Construction

22-gauge die-formed galvanized steel junction box • Conduit cable with quick connect electrical plug pre-wired on junction box and allows for easy electrical connection with the trim module • Junction box provided with (5) 1/2" and (1) 3/4" knockouts, (4) integrated wire traps for 12/2 or 12/3 NM cable UL listed and cUL listed for through-branch wiring, maximum of 4 #12 branch circuit

#### New Construction Mounting Frame

22-gauge die-formed galvanized steel mounting frame • Rough-in section (junction box, mounting frame and bar hangers) fully assembled for ease of installation • Pre-installed Air-Loc gasket applied to frame • Conduit cable with quick connect electrical plug pre-wired on junction box and allows for easy electrical connection with the trim module • Junction box provided with (5) 1/2" and (1) 3/4" knockouts, (4) knockouts for 12/2 or 12/3 NM cable and ground wire • UL listed and cUL listed for through-branch wiring, maximum of 6 #12 branch circuit conductors • Junction box provided with removable access plates • Knock-outs equipped with pryout slots

Includes Patented (US Patent D552,969) Real Nail® 3 bar hangers: telescoping system permits quick placement of housing any where within 24" O.C. joists or suspended ceilings • Includes removable nail for repositioning of fixture in wood joist construction • Integral T-bar notch and clip for suspended ceilings.

LED housing is designed to provide 50,000 hours of life • 5 year limited warranty on LED components.

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.



Control the LED color temperature and lumen output in your space with the switchable LED color temperature and adjustable lumen output switches accessible directly on the Podz trim.






# Podz™ LED Downlight Series


4" Canless Round and Square LED Downlight  
New Construction or Remodel

## TECHNICAL DATA



### Dimensional Data and Electrical Data

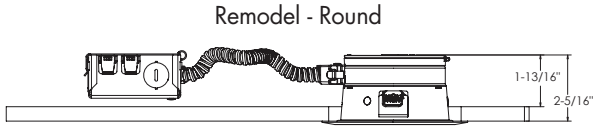


4 1/2" CEILING CUTOUT

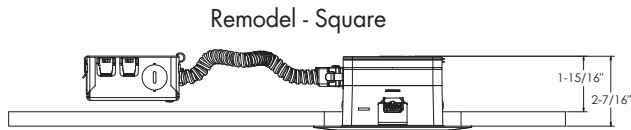

4 3/4" ROUND CEILING CUTOUT

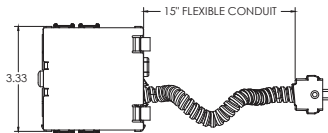


New Construction - Round

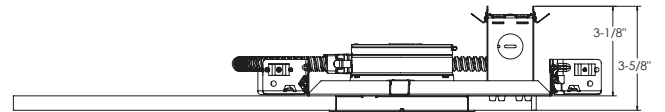


4 1/2" CEILING CUTOUT

New Construction - Square

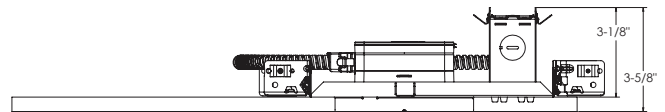

4 3/4" ROUND CEILING CUTOUT

**Note:** For ease of installation, a larger sized round cutout is used for the 4" square mounting frame.

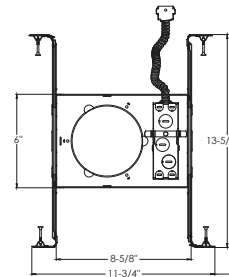

### ELECTRICAL DATA

#### Dedicated 120V Only Driver Option (120 FRPC)

	700L	1000L	1200L
Input Power	8.1W (+/-5%)	13.6W (+/-5%)	15W (+/-5%)
Input Current	0.07A	0.11A	0.13A
Frequency	50/60Hz	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (residential)	FCC Title 47 CFR, Part 15, Class B (residential)	FCC Title 47 CFR, Part 15, Class B (residential)
Minimum starting temp	-20°C	-20°C	-20°C

### ELECTRICAL DATA

#### Universal Voltage

#### MVOLT ZT10

	700L		1000L		1200L	
	120V	277V	120V	277V	120V	277V
Input Power	8.1W (+/-5%)	8.1W (+/-5%)	13.6W (+/-5%)	13.6W (+/-5%)	15W (+/-5%)	15W (+/-5%)
Input Current	0.07A	0.03A	0.11A	0.05A	0.13A	0.06A
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47 CFR, Part 15, Class B (residential)	FCC Title 47 CFR, Part 15, Class B (residential)	FCC Title 47 CFR, Part 15, Class B (residential)	FCC Title 47 CFR, Part 15, Class B (residential)	FCC Title 47 CFR, Part 15, Class B (residential)	FCC Title 47 CFR, Part 15, Class B (residential)
Minimum starting temp	-20°C	-20°C	-20°C	-20°C	-20°C	-20°C



# Podz™ LED Downlight Series

4" Canless Round and Square LED Downlight  
New Construction or Remodel

## PHOTOMETRICS

Distribution Curve


Distribution Data

Output Data

Coefficient of Utilization


Illuminance Data at 30" Above  
Floor for a Single Luminaire

JPDZ4 DB 07LM 30K 90CRI WWH, Input Watts: 8.1, Delivered Lumens: 672, LPW: 83.0, S/MH: 1.11, Test No: 20-973-1

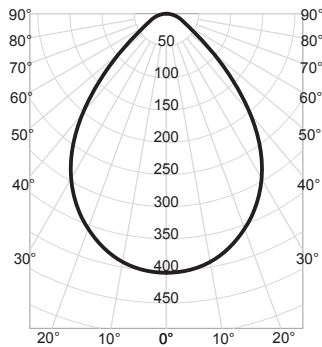


CP Summary		Zonal Lumen Summary		Coefficients of Utilization						Cone of Light			Luminance (cd/sq.m)						
0°	Zone	Lumens	% Fixture	pf	80%		20%		50%		Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance					
				pc	50%	30%	10%	50%	30%	10%					50%	30%	10%		
0°	0° - 30°	295	44%	0	119	119	119	116	116	116	111	111	111	111	6.0	11.2	10.1	0°	65,673
5°	0° - 40°	452	67%	1	108	104	101	105	102	100	101	99	97	8.0	6.3	13.5	45°	33,417	
15°	0° - 60°	619	92%	2	97	92	87	95	90	86	92	88	84	10.0	4.0	16.8	55°	16,678	
25°	0° - 90°	672	100%	3	88	81	76	86	80	75	84	78	74	12.0	2.8	20.2	65°	11,259	
35°	90° - 180°	0	0%	4	80	73	67	79	72	67	76	71	66	14.0	2.1	23.6	75°	10,515	
45°	0° - 180°	672	100%	5	73	65	60	72	65	60	70	64	59				85°	8,975	
55°		59		6	67	59	54	66	59	54	64	58	53	Beam Angle: 80.2°					
65°		29		7	62	54	49	61	54	49	59	53	48	Field Angle: 119.3°					
75°		17		8	57	50	44	56	49	44	55	49	44						
85°		5		9	53	46	41	52	45	41	51	45	41						
90°		0		10	49	42	38	49	42	37	48	42	37						

JPDZ4 DB 10LM 30K 90CRI WWH, Input Watts: 13.6, Delivered Lumens: 1028, LPW: 75.6, S/MH: 1.12, Test No: 20-973-2

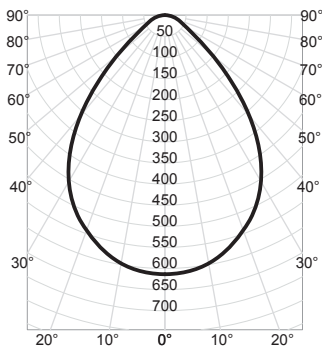

CP Summary		Zonal Lumen Summary		Coefficients of Utilization						Cone of Light			Luminance (cd/sq.m)					
0°	Zone	Lumens	% Fixture	pf	80%		20%		50%		Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance				
				pc	50%	30%	10%	50%	30%	10%					50%	30%	10%	
0°	0° - 30°	451	44%	0	119	119	119	116	116	116	111	111	111	6.0	17.0	10.1	0°	99,993
5°	0° - 40°	692	67%	1	108	104	101	105	102	100	101	99	97	8.0	9.6	13.5	45°	51,301
15°	0° - 60°	948	92%	2	97	92	87	95	90	86	92	88	84	10.0	6.1	16.9	55°	25,656
25°	0° - 90°	1,028	100%	3	88	81	76	86	80	75	84	78	74	12.0	4.3	20.3	65°	17,198
35°	90° - 180°	0	0%	4	80	73	67	79	72	67	76	71	66	14.0	3.1	23.7	75°	16,056
45°	0° - 180°	1,028	100%	5	73	65	60	72	65	60	70	64	59				85°	13,649
55°		90		6	67	59	54	66	59	54	64	58	53	Beam Angle: 80.4°				
65°		45		7	62	54	49	61	54	49	59	53	48	Field Angle: 119.4°				
75°		26		8	57	50	44	56	49	44	55	49	44					
85°		7		9	53	46	41	52	45	41	51	45	40					
90°		0		10	49	42	37	49	42	37	48	42	37					

JPDZ4 DB 12LM 30K 90CRI WWH, Input Watts: 15.0, Delivered Lumens: 1116, LPW: 74.4, S/MH: 1.12, Test No: 20-973-3

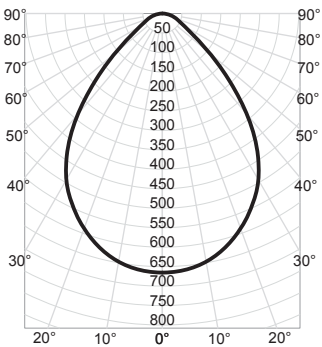

CP Summary		Zonal Lumen Summary		Coefficients of Utilization						Cone of Light			Luminance (cd/sq.m)					
0°	Zone	Lumens	% Fixture	pf	80%		20%		50%		Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance				
				pc	50%	30%	10%	50%	30%	10%					50%	30%	10%	
0°	0° - 30°	488	44%	0	119	119	119	116	116	116	111	111	111	6.0	18.5	10.2	0°	108,434
5°	0° - 40°	750	67%	1	108	104	101	105	102	100	101	99	97	8.0	10.4	13.5	45°	55,818
15°	0° - 60°	1,029	92%	2	97	92	87	95	90	86	92	88	84	10.0	6.7	16.9	55°	27,928
25°	0° - 90°	1,116	100%	3	88	81	76	86	80	75	84	78	74	12.0	4.6	20.3	65°	18,702
35°	90° - 180°	0	0%	4	80	73	67	79	72	67	76	70	66	14.0	3.4	23.7	75°	17,441
45°	0° - 180°	1,116	100%	5	73	65	60	72	65	60	70	64	59				85°	14,771
55°		98		6	67	59	54	66	59	54	64	58	53	Beam Angle: 80.5°				
65°		49		7	62	54	49	61	54	49	59	53	48	Field Angle: 119.5°				
75°		28		8	57	50	44	56	49	44	55	49	44					
85°		8		9	53	46	41	52	45	41	51	45	40					
90°		0		10	49	42	37	49	42	37	48	42	37					




# Podz™ LED Downlight Series

4" Canless Round and Square LED Downlight  
New Construction or Remodel

## PHOTOMETRICS


Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire

JPDZ4 DC 07LM 30K 90CRI HZWH, Input Watts: 8.1, Delivered Lumens: 699, LPW: 86.3, S/MH: 1.07, Test No: 20-973-4

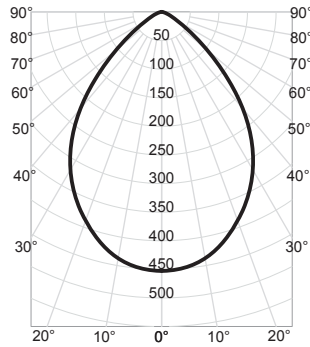


CP Summary				Zonal Lumen Summary				Coefficients of Utilization						Cone of Light			Luminance (cd/sq.m)	
0°	Zone	Lumens	% Fixture	pw	80%		20%		50%	50%	50%	50%	Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance		
					50%	30%	10%	50%									30%	10%
0°	0° - 30°	323	46%	0	119	119	119	116	116	111	111	111	6.0	12.6	9.9	0° 73,789		
5°	0° - 40°	493	70%	1	109	106	103	106	104	101	102	100	8.0	7.1	13.2	45° 36,874		
15°	0° - 60°	672	96%	2	99	94	89	97	92	88	94	90	10.0	4.5	16.5	55° 17,047		
25°	0° - 90°	699	100%	3	90	84	79	88	83	78	86	81	12.0	3.1	19.8	65° 7,404		
35°	90° - 180°	0	0%	4	82	75	70	81	74	69	78	73	14.0	2.3	23.1	75° 3,463		
45°	0° - 180°	699	100%	5	75	68	62	74	67	62	72	66	Beam Angle: 78.9°					
55°		60		6	69	62	56	68	61	56	66	60	Field Angle: 114.9°					
65°		19		7	63	56	51	63	56	51	61	55						
75°		6		8	59	52	47	58	51	46	57	51						
85°		1		9	55	47	43	54	47	43	53	47						
90°		0		10	51	44	39	50	44	39	49	43						

JPDZ4 DC 10LM 30K 90CRI HZWH, Input Watts: 13.6, Delivered Lumens: 1070, LPW: 78.7, S/MH: 1.07, Test No: 20-973-5

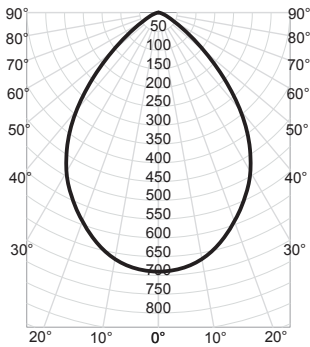

CP Summary				Zonal Lumen Summary				Coefficients of Utilization						Cone of Light			Luminance (cd/sq.m)	
0°	Zone	Lumens	% Fixture	pw	80%		20%		50%	50%	50%	50%	Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance		
					50%	30%	10%	50%									30%	10%
0°	0° - 30°	493	46%	0	119	119	119	116	116	111	111	111	6.0	19.2	9.9	0° 112,427		
5°	0° - 40°	754	70%	1	109	106	103	106	104	101	102	100	8.0	10.8	13.2	45° 56,624		
15°	0° - 60°	1,029	96%	2	99	94	89	97	92	88	94	90	10.0	6.9	16.6	55° 26,224		
25°	0° - 90°	1,070	100%	3	90	84	79	88	83	78	85	81	12.0	4.8	19.9	65° 11,298		
35°	90° - 180°	0	0%	4	82	75	70	81	74	69	78	73	14.0	3.5	23.2	75° 5,289		
45°	0° - 180°	1,070	100%	5	75	68	62	74	67	62	72	66	Beam Angle: 79.3°					
55°		92		6	69	61	56	68	61	56	66	60	Field Angle: 114.9°					
65°		29		7	63	56	51	63	56	51	61	55						
75°		8		8	59	51	46	58	51	46	57	51						
85°		1		9	54	47	43	54	47	43	53	47						
90°		0		10	51	44	39	50	44	39	49	43						

JPDZ4 DC 12LM 30K 90CRI HZWH, Input Watts: 15.0, Delivered Lumens: 1149, LPW: 76.6, S/MH: 1.07, Test No: 20-973-6

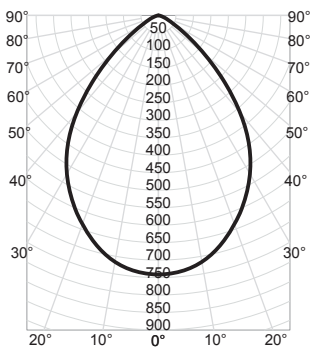

CP Summary				Zonal Lumen Summary				Coefficients of Utilization						Cone of Light			Luminance (cd/sq.m)	
0°	Zone	Lumens	% Fixture	pw	80%		20%		50%	50%	50%	50%	Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance		
					50%	30%	10%	50%									30%	10%
0°	0° - 30°	529	46%	0	119	119	119	116	116	111	111	111	6.0	20.6	9.9	0° 120,819		
5°	0° - 40°	809	70%	1	109	106	103	106	104	101	102	100	8.0	11.6	13.2	45° 60,796		
15°	0° - 60°	1,104	96%	2	99	94	89	97	92	88	94	90	10.0	7.4	16.6	55° 28,127		
25°	0° - 90°	1,149	100%	3	90	84	79	88	83	78	86	81	12.0	5.1	19.9	65° 12,146		
35°	90° - 180°	0	0%	4	82	75	70	81	74	69	78	73	14.0	3.8	23.2	75° 5,667		
45°	0° - 180°	1,149	100%	5	75	68	62	74	67	62	72	66	Beam Angle: 79.2°					
55°		99		6	69	61	56	68	61	56	66	60	Field Angle: 114.9°					
65°		32		7	63	56	51	63	56	51	61	55						
75°		9		8	59	51	46	58	51	46	57	51						
85°		1		9	54	47	43	54	47	43	53	47						
90°		0		10	51	44	39	50	44	39	49	43						

### 4" LUMEN OUTPUT MULTIPLIERS

CCT	DB WWH	DB BWH	DC WWH	DC CWH	DC WHZWH	DC HZWH
2700K	1.01	0.78	1.07	1.11	1.03	1.01
3000K	1.00	0.77	1.06	1.09	1.01	1.00
3500K	1.00	0.77	1.07	1.10	1.02	1.00
4000K	1.01	0.78	1.07	1.11	1.02	1.01
5000K	1.00	0.77	1.06	1.09	1.01	1.00
Warm Dim	0.92	0.71	0.98	1.01	0.93	0.92